



Royaleson

*Exclusive wooden  
floors*



### Why choose Finishparkiet?

Finishparkiet is the leader in ready-made double-layer floors! Finishparkiet was the first manufacturer in the world to launch production of double-layer single-lamella 14-millimetre-thick parquet, which has since become the benchmark for other manufacturers.

Each piece of the exclusive Finishparkiet flooring stands for long years of tradition, history, experience and passion.

We meet the expectations of the most discerning customers – we stand out with our top-quality natural wooden floors.

With our floors you are guaranteed to choose a product which you will be enjoying for many years, perhaps even the entire lifetime! We offer a 50-year guarantee for our product!



**NOVELTY:  
MATTE VARNISH**



**3 LAYERS  
OF OIL-WAX**



**7-LAYER  
VARNISH**



**BEVELLING**



**BRUSHING**



**UNDERFLOOR  
HEATING**



**DOUBLE-LAYER  
FLOOR**



*Where does the secret of Finishparkiet lie?*

- natural oil-wax or 7-layer UV hardened varnish
- clear and precise floor classification
- top precision of manufacture
- perfect for underfloor heating
- glued floor – we avoid the resonance effect
- company experience
- recognized manufacturer on the European market



Controlled quality.





# A pioneer in environmental care



- Our business is manufacturing beautiful and functional products, using the best raw materials with entirely natural origins.
- „Always live at peace with nature”, this motto best reflects the principles that we follow in all the stages of the production process.
- Our goal is to create a natural wood product that is absolutely safe for people and the environment, and manufactured in the way that preserves the balance in nature.
- Top-quality types of varnishes, oils, adhesives and all other materials used in the production process are duly attested and certified, which guarantees safety to you and your family.





MATTE VARNISH



3 LAYERS  
OF OIL-WAX



7-LAYER  
VARNISH



BEVELLING



BRUSHING



UNDERFLOOR  
HEATING



DOUBLE-LAYER  
FLOOR





### French Finishjodła

Traditional perfection in a modern setting! Wooden floors laid in the pattern of French Fir characterise themselves with exceptional elegance. As early as in the 16th century, it was favoured by French aristocracy, and this type of flooring decorated interiors of numerous castles and palaces in the Loire Valley. It is timeless, which makes it perfect in classic interiors and with modern arrangements. It features a symmetrical diagonal arrangement of the pieces, whose shorter edges are cut at the angle of 45°. The pattern of French Fir has always been viewed as one that requires a painstaking process of precisely cutting each piece, leaving ample waste material, and the need to use the so-called biscuit, but our product completely revises that view.


FINISHJodła is a top-quality layered product, which is thoroughly prepared as early as in the stage of production.

Here are the dimensions to choose from:


- 560/65-70/14 mm – top layer 6 mm thick
- 600/140-150/14 mm – top layer 4 mm thick

Optionally possible finish: BRUSHING


### Selected wood types

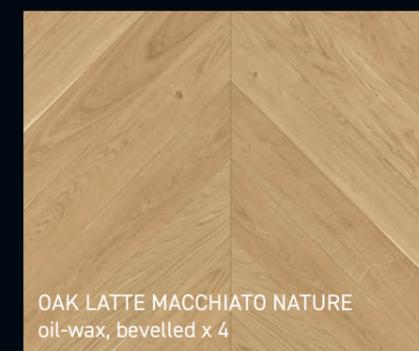

OAK LATTE MACCHIATO NATURE  
oil-wax, bevelled x 4

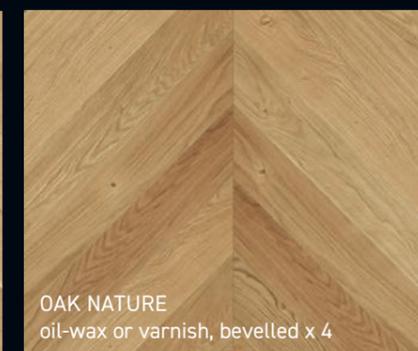

OAK NATURE  
oil-wax or varnish, bevelled x 4

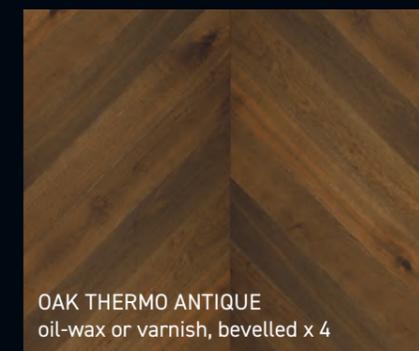

OAK THERMO ANTIQUE  
oil-wax or varnish, bevelled x 4



OAK EXCLUSIVE  
oil-wax or varnish, bevelled x 4









*English Finishjodła*


English herringbone, also known as classic, is a pattern, in which single pieces are arranged so that their shorter ends do not meet directly. Identical pieces are arranged so that the shorter end of one piece meets the longer side of another piece at the right angle. There are several arrangements of the herringbone pattern: single, double, square and many more.

The English herringbone (classic) pattern dates as far back as the times of the Roman Empire. The name refers to the characteristic arrangement of pieces, which resemble a coniferous tree with its branches stemming from the core. Romans used to lay cobblestone roads in this way, thanks to which they were more durable, strong and stable. English herringbone lends the interior a timeless character and elegance. It looks perfect in any interior: art deco, eclectic or vintage. It is now used more and more often in modern settings dominated by minimalism.


The dimensions that we offer:

- 600-750/130-150/14, 4 millimetre-thick usable layer


Optionally possible finish: BRUSHING

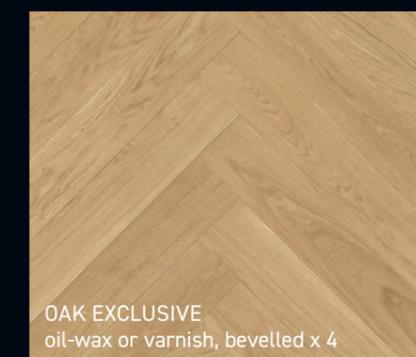

OAK EXCLUSIVE  
oil-wax or varnish, bevelled x 4

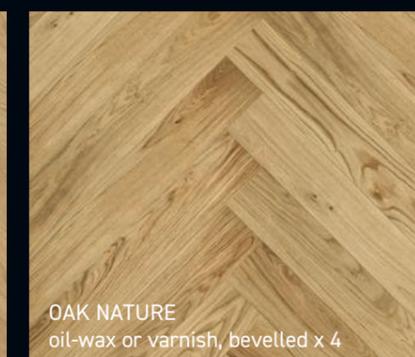

OAK NATURE  
oil-wax or varnish, bevelled x 4

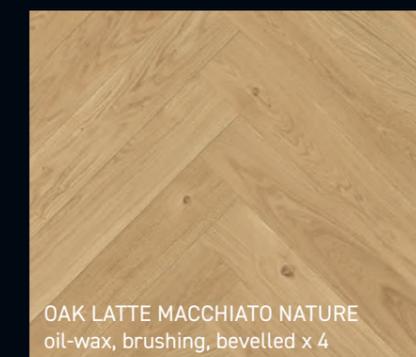

OAK LATTE MACCHIATO NATURE  
oil-wax, brushing, bevelled x 4



OAK THERMO NATURE  
oil-wax or varnish, bevelled x 4

Selected wood types



Take a look at our selected floors on offer, more on: [www.finishparkiet.com.pl](http://www.finishparkiet.com.pl). The colours on the samples may vary from those on the original products.



OAK VENICE  
oil/varnish, brushing, bevelled x 4




OAK WHITENED NATURE  
oil-wax, bevelled x 4



OAK VENICE ANTIQUE  
oil-wax/varnish, brushing, bevelled x 4



OAK SATIN GREY NATURE  
oil-wax/varnish, bevelled x 4

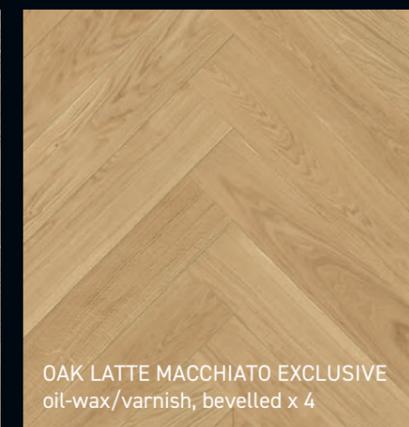

OAK LATTE MACCHIATO EXCLUSIVE  
oil-wax/varnish, bevelled x 4

Selected wood types



220-240 mm

1600-2200 mm



160-180 mm

1400-2000 mm



MATTE VARNISH



3 LAYERS OF OIL-WAX



7-LAYER VARNISH



BEVELLING



BRUSHING



UNDERFLOOR HEATING



DOUBLE-LAYER FLOOR



*Finishdeska XXL*

This unconventionally aesthetic floor is perfectly suitable in interiors finished in the spirit of modern European and global trends. Carefully selected oak planks offer a feeling of elegance and comfort. Finishdeska XXL which, due to its dimensions is a symbol of luxury, preserves the precision of construction and reliable features of classic Finishparkiet planks and parquets.


Available dimensions:

- 1400-2000/160-180/15 mm, thickness of top layer approx. 3.5 mm
- 1600-2200/220-240/15 mm thickness of top layer approx. 3.5 mm


**NOVELTY** – a possibility to finish with matte varnish.



OAK EXCLUSIVE  
varnish/oil/varnish matte

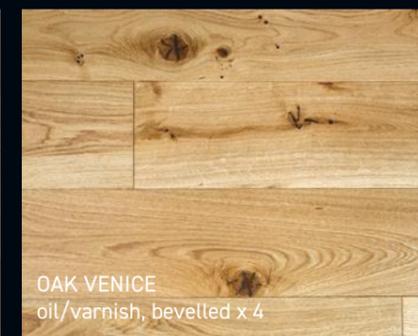

OAK VENICE  
oil/varnish, bevelled x 4

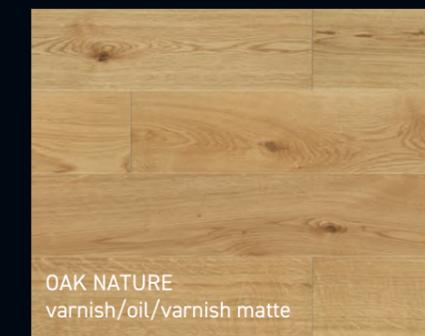

OAK NATURE  
varnish/oil/varnish matte



OAK VENICE ANTIQUE  
oil-wax/varnish, bevelled x 4



OAK LATTE MACCHIATO NATURE  
varnish/oil



AMERICAN WALNUT NATURE  
varnish, bevelled x 4

Selected wood types



FINISHDESKA XXL OAK NATURE, OIL, BEVELLED X4



FINISHDESKA XXL OAK EXCLUSIVE, VARNISH MATTE, BRUSHED, BEVELLED X4



FINISHDESKA XXL OAK NATURE, OIL, BEVELLED X4



FINISHDESKA XXL OAK NATURE, VARNISH MATTE, BRUSHED, BEVELLED X4



MATTE VARNISH



3 LAYERS OF OIL-WAX



7-LAYER VARNISH



BEVELLING



BRUSHING



UNDERFLOOR HEATING



DOUBLE-LAYER FLOOR



Take a look at our selected floors on offer, more on: [www.finishparkiet.com.pl](http://www.finishparkiet.com.pl). The colours on the samples may vary from those on the original products.



Superior quality

FINISHDESKA OAK EXCLUSIVE, VARNISH, BEVELLED X 4

### *Finishdeska*


Available dimensions: 900-1200/130-150/12 or 14 mm.  
Thicknesses of top layer: 3, 4 or 6 mm

The floor consists of two layers: the top layer entirely made of solid material- natural wood, and the bottom layer, i.e., a mosaic made of hardwood, predominantly oak and ash.


As the layers are placed perpendicularly, the rings in the top layer go across those in the bottom layer, which provides stability and prevents warping of the floor.




OAK EXCLUSIVE  
oil/varnish/matte varnish, bevelled x 4

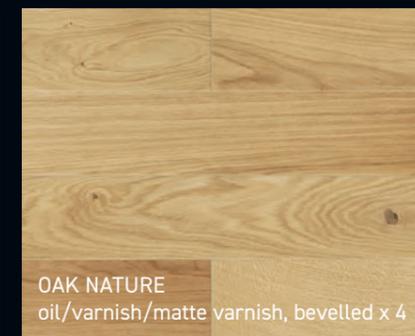

OAK NATURE  
oil/varnish/matte varnish, bevelled x 4

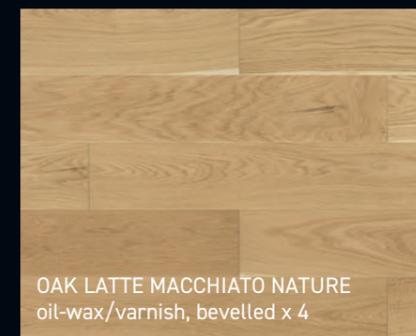

OAK LATTE MACCHIATO NATURE  
oil-wax/varnish, bevelled x 4

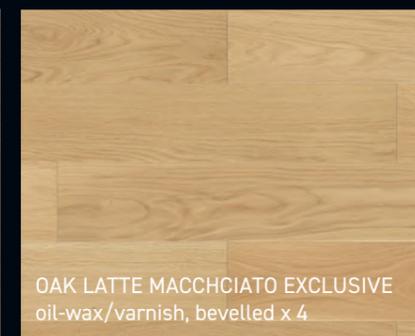


OAK LATTE MACCHIATO EXCLUSIVE  
oil-wax/varnish, bevelled x 4

More colors on the next page >

also look at our selected floors on offer, more in: [www.finishdesk.com.pl](http://www.finishdesk.com.pl). The colours on the samples may vary from those on the original products.




Selected wood types

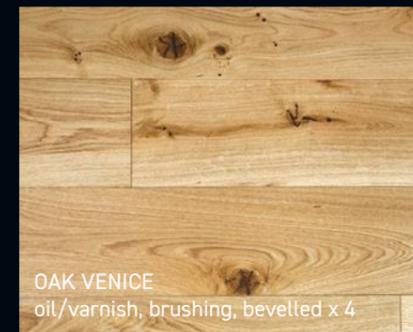

OAK VENICE  
oil/varnish, brushing, bevelled x 4




OAK VENICE ANTIQUE  
oil-wax/varnish, brushing, bevelled x 4

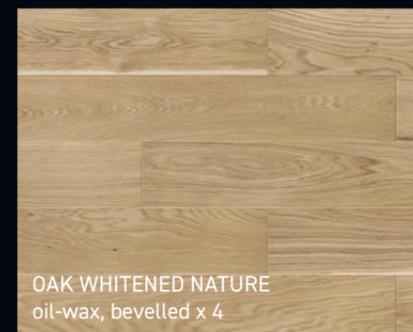


OAK WHITENED NATURE  
oil-wax, bevelled x 4




OAK THERMO ANTIQUE NATURE  
oil/varnish, bevelled x 4

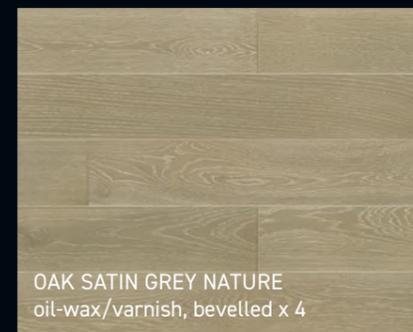


OAK SATIN GREY NATURE  
oil-wax/varnish, bevelled x 4

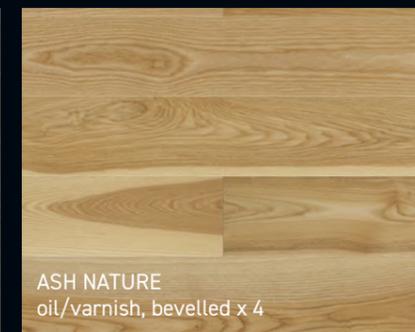

ASH NATURE  
oil/varnish, bevelled x 4

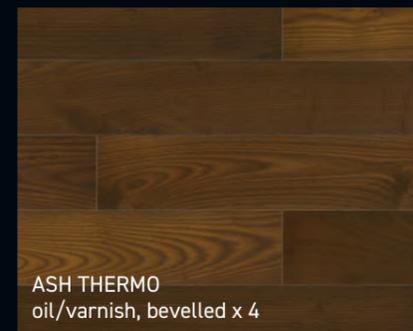

ASH THERMO  
oil/varnish, bevelled x 4

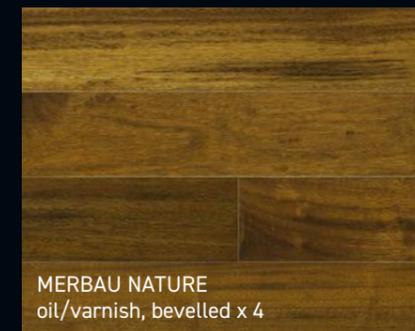

MERBAU NATURE  
oil/varnish, bevelled x 4

| FINISHDESKA OAK THERMO ANTIQUE, VARNISH



| FINISHDESKA OAK NATURE, VARNISH, BRUSHED, BEVELLED X 4







MATTE VARNISH



3 LAYERS OF OIL-WAX



7-LAYER VARNISH



BEVELLING



BRUSHING



UNDERFLOOR HEATING



DOUBLE-LAYER FLOOR



Take a look at our selected floors on offer, more on: [www.finishparkiet.com.pl](http://www.finishparkiet.com.pl). The colours on the samples may vary from those on the original products.


A floor equally durable and beautiful....

*Finishparkiet*


This is a ready parquet consisting of two layers: the top layer made entirely of solid material – natural wood, and the bottom layer made of hardwood, predominantly oak and ash.

As the layers are placed perpendicularly, the rings in the top layer go across those in the bottom layer, which provides stability and prevents warping of the floor.


Lamellas are available in dimensions 490/70/14 mm.  
Thicknesses of the top layer: 6 mm or 4 mm.

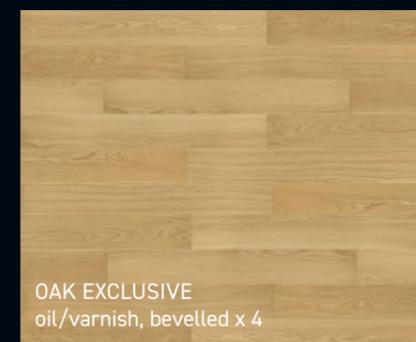

OAK EXCLUSIVE  
oil/varnish, bevelled x 4

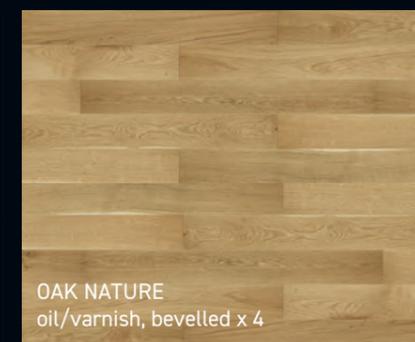

OAK NATURE  
oil/varnish, bevelled x 4

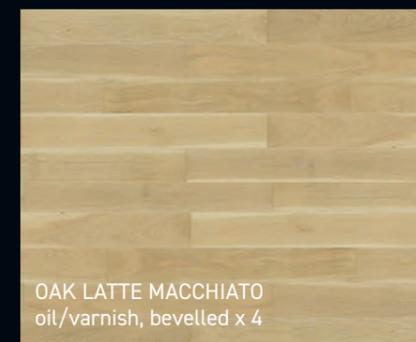

OAK LATTE MACCHIATO  
oil/varnish, bevelled x 4



OAK THERMO ANTIQUE NATURE  
oil/varnish, bevelled x 4

# Technical description

## FINISHDESKA



dimensions in mm	
length	900-1200
width	130-150
thickness	12-14
top-layer thickness	3,4 lub 6

The pieces are machine-polished (and not traditionally after installation) which makes for the floor being processed with great precision.

Due to its thickness, the parquet may be combined with ceramic tiles, and its thermal permeability allows it to be used with underfloor heating.

„Finishparkiet” floors glued to the base may be renovated several times by scraping and applying fresh layers of varnish or oil.

## FINISHPARKIET




dimensions in mm	
length	490, 560 oraz 630
width	65-70
thickness	12-14
top-layer thickness	ok. 6 i 4

the top layer is approx. 6 mm  
One cycle of scraping only removes tytko 0,25 mm of the top layer



## FINISHDESKA XXL

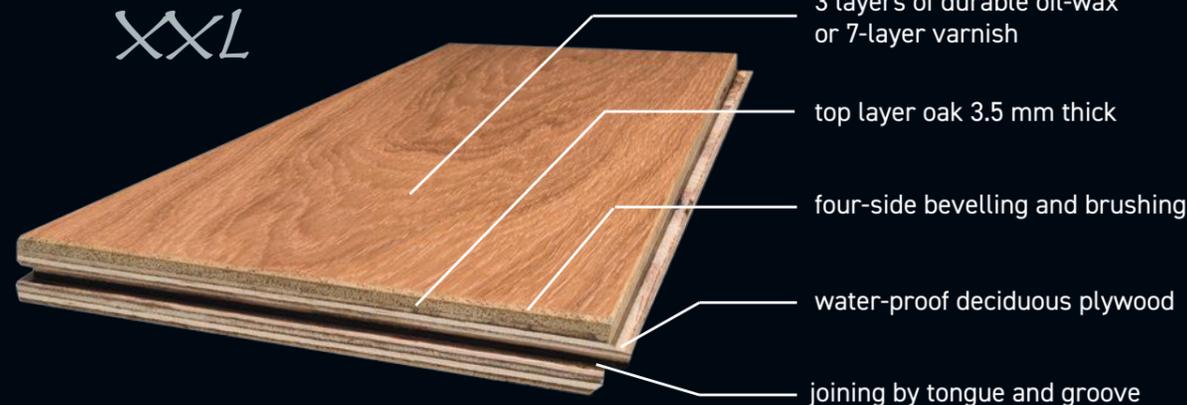


dimensions in mm	
length	1400-2200
width	160-240
thickness	15
top-layer thickness	ok. 3,5

Dimensions to choose from:  
 ■ 1400-2000/160-180/15 mm  
 ■ 1600-2200/200-240/15 mm

Finishing options:

- OIL
- VARNISH
- VARNISH MATTE

# Types of finish

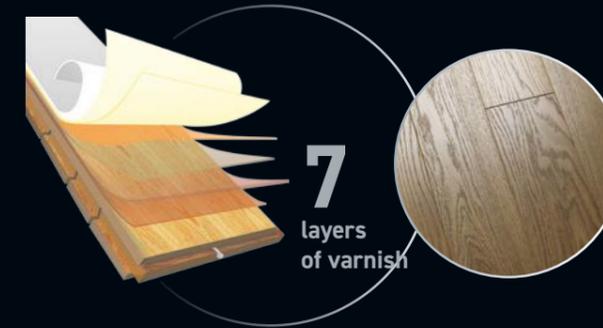

### VARNISHED:

- 7-layer varnish hardened with UV rays,
- varnish permanently bonded with wood, does not crack or peel,
- highly resistant to abrasion.

### NOVELTY!

Available also in matte varnish



### OIL-WAXED:

- three layers of oil-wax,
- deep impregnation of wood by penetration of oil,
- high resistance to abrasion.



### BRUSHED:

- 7-layer varnish hardened with UV rays or three layers of oil-wax,
- technological process of aging by brushing and rolling wooden pieces,
- two- or four-side bevelling.

## POSSIBLE FINISHES



3 LAYERS OF OIL-WAX



7 LAYERS OF VARNISH



MATTE VARNISH



BRUSHING



BEVELLING



UNDERFLOOR HEATING



DOUBLE-LAYER FLOOR

Products also available with two-side or four-side bevel.

# Information

## THE RESULTS OF VARSHISH LAYER RESISTANCE TEST FOR FINISHPARKIET FLOORS

Substance	Test duration	Substance	Test duration
Acetone	10 seconds	ethyl butyl acetate	10 seconds
Ethanol	60 minutes	olive oil	16 hrs
Petro	2 minutes	beer	5 hrs
Onion	5 hrs	cleaning solvent	60 minutes
Cola	16 hrs	sodium	2 minutes
Black tea	16 hrs	blackcurrant juice	16 hrs
black ink	16 hrs	salty water	5 hrs
stamp ink	16 hrs	lipstick	16 hrs
coffee powder	16 hrs	cleaning agent	60 minutes
citric acid	60 minutes	disinfectant	10 minutes
acetic acid	60 minutes	wine	5 hrs
butter	16 hrs	water	16 hrs
condensed milk	16 hrs	ammonia water	2 minutes
mustard	5 hrs		

Duration of the test - time in which no changes to the layer were observed.  
We hold all respective approvals for the glue and varnishes from the National Institute of Hygiene.

## WOOD HARDNESS CLASSIFICATION

American walnut			
Oak			
Ash			
Merbau			
Doussie			
Jatoba			

Finishparkiet reserved the right to introduce insignificant changes to colours and to withdraw selected products from the offer. Products currently available are listed on our website.

# Registration Certificates

The company hold quality approvals and certificates for the products.

The brand name and logo of Finishparkiet and Finishdeska are reserved.

**bsi.**  

### Certificate of Registration

QUALITY MANAGEMENT SYSTEM - ISO 9001:2015

This is to certify that: **FINISHPARKIET FABRYKA PARKIETU Sp. z ograniczona odpowiedzialnoscia**  
Sp.K.  
ul. Grunwaldzka 61  
Nowe Miasto Lubawskie  
13-300  
Poland

Holds Certificate No: **FM 632634**  
and operates a Quality Management System which complies with the requirements of ISO 9001:2015 for the following scope:  
Production and sale of wooden floors.

For and on behalf of BSI:   
Andrew Launn, EMEA Systems Certification Director

Original Registration Date: 2015-03-29  
Latest Revision Date: 2021-03-01  
Effective Date: 2021-03-30  
Expiry Date: 2024-03-29

Page: 1 of 1

...making excellence a habit.™

This certificate was issued electronically and remains the property of BSI and is bound by the conditions of contract. An electronic certificate can be authenticated [here](https://www.bsigroup.com/ClientDirectory). Printed copies can be validated at [www.bsigroup.com/ClientDirectory](https://www.bsigroup.com/ClientDirectory).  
Information and Contact: BSI, Kitemark Court, Davy Avenue, Knowlhill, Milton Keynes MK5 8PP, UK. Tel: +44 345 080 9000  
BSI Assurance UK Limited, registered in England under number 7805321 at 389 Chiswick High Road, London W4 4AL, UK.



Take a look at how your dream floor is manufactured.



# Recommendations

## The technique for laying FINISHPARKIET and FINISHDESKA floors:

- the walls and an even concrete floor: the walls may be painted, depending on the method, we may start from the wall, a corner or the middle of the room,
- wedges at the wall: place wedges between the wooden pieces and the wall, leaving 1cm distance,
- gluing: apply adhesive with a comb and lay the pieces forming a desired pattern,
- cut the pieces as required,
- finish the floor with skirting boards and apply the impregnate.

## The manufacturer's recommendations for laying and using FINISHPARKIET and FINISHDESKA floors:

The modern joining system makes for a simple and efficient installation, and by following a few basic care guidelines makes it possible to maintaining our floor in perfect condition for many year. In order for the use to be fully satisfied with our product, we recommend the following.

### Before laying the floor:

- the packaging, in which FINISHPARKIET/FINISHDESKA products are sold is not hermetic, which is why it is important to take special care while storing it,
- parquet/planks need to be stored in original undamaged packaging, in room with stable temperature of between 18÷22°C and relative air humidity of between 45÷60%, unpack directly prior to installation,
- do not air-condition the parquet/planks before installation,

Only authorised sales outlets holding the company certificate guarantee the sales of original FINISHPARKIET products.

Finishparkiet floors are packed in original cardboard boxes with a clearly visible green logo.



- we recommend gluing the floor on a surface that is even, strong, dry and free of cracks and manages,
- surface humidity should be as follows: concrete screed - 2,0% CM, concrete - 2,0% CM, anhydrite base panels - 0,5% CM.

Surface humidity in case of underfloor heating should be as follows: concrete screed - 1,8% CM, concrete - 1,8% CM, anhydrite base panels - 0,3% CM,

· before priming, the surface should be polished to remove cement or anhydrite powder, and thoroughly vacuumed,

- uneven floors should be levelled with a self-leveling mass,

- we recommend application of primers prior to applying the adhesive,

■ the room should be painted and laying the floor should be the last construction process in the room. In case the walls and the ceiling need to be painted once the parquet/planks floor is in place, secure it with corrugated paper and foil, but only after it has been impregnated,

■ protecting the floor with foil and corrugated paper does not mean that it is sufficiently protected against damage that may result from other construction work in the room.

### While laying the floor:

■ while laying the parquet/plank floor, air temperature should be approximately 18÷22°C, and air humidity - 45÷60%. This scope of temperatures and humidity levels corresponds to the floor humidity at 7±2% and this level of humidity should be maintained throughout the entire period of using FINISHPARKIET/FINISHDESKA floors,

- for laying the floor, we recommend using adhesives for finished,

# Recommendations

- thickness of applied adhesive and its consumption depend directly on how even the base surface,

■ any pieces stained with adhesive should be cleaned as recommended by the adhesive manufacturer. It is advisable to make a test on pieces not yet attached to the floor,

■ parquet pieces should be laid to the extending tongue, which makes fitting easier and saves time for installation of the floor.

### After laying the floor:

■ once the floor is in place, remove the wedges and attach skirting boards,

■ sweep and vacuum the floor, remove and adhesive stains with damp cloth,

■ the finished floor should be secured with a varnished or oiled floor conservation agent, recommended by the parquet/floor seller. This will prevent accidentally spilled water to penetrate the tiny gaps between parquet pieces and planks,

■ impregnating the floor does not fully protect against the effects of water penetration,

■ further maintenance of the floor should be carried out observing the guidelines provided by the manufacturer of the maintenance product,

■ do not apply any additional coats of varnish,

■ when washing the floor use damp cloth or a well drained mop, avoid excessive amounts water,

■ in case the temperature in the rooms remains at the standard 18÷22°C and relative air humidity below 45÷50%, pieces will begin to contract and tiny gaps will appear. This may also lead to warping and deformation of the floor,

■ in case the temperature in the rooms remains at the standard (18÷22°C) relative air humidity over 55÷60%, the floor may begin to warp, deform or bulge.

### It is worth knowing that:

The greatest enemies of wooden floors are water and sand. Floors should be cleaned by sweeping, vacuuming and occasionally wiping with a damp but not wet mop.

In order to protect the wooden floor against water and sand, and in winter also salt, it is advisable to place protective mats at the front door of the house or flat.

Skirting boards, furniture legs and other area where furniture exert pressure on the floor should also be secured with felt pads: it is unacceptable to attach those with nails. Please avoid walking on the floor wearing high-heel shoes.



### Maintenance and exploitation:

■ the greatest enemies of wooden floors are water and sand. Floors should be cleaned by sweeping, vacuuming and occasionally wiping with a damp cloth or a well-drained mop,

■ in order to protect the wooden floor against water and sand, and in winter also salt, it is advisable to place protective mats at the front door of the house or flat. Using protective and wiping mats reduces the amount of sand, water and salt that is brought inside,

■ all skirting boards, furniture legs and other points of pressure on the floor should be secured with felt or rubber pads – it is unacceptable to attach the pads with nails. It is advisable to use soft round pads underneath armchairs. Please avoid walking on the floor wearing high-heel shoes.

